


## 20 GHz Signal Source for PXI Express

The SC5510A is a single PXIE Slot, high performance VCO based synthesized signal source with frequency ranging from 100 MHz to 20 GHz. Despite its small single slot PXI form factor, it packs the instrument grade performance of large box instruments. Boasting low phase noise of -137 dBc/Hz @ 10 kHz offset from a 1 GHz carrier, tuning the entire band at 1 Hz resolution, and having amplitude step resolution of 0.01 dB over the range of < -25 dBm to +13 dBm sets the SC5510A apart from other small modular synthesizers. Furthermore, using a unique multiple phase-locked loop architecture the phase spurs are typically kept below -65 dBc across the tuning range, even at 1 Hz step resolution. Furthermore, using a high fundamental frequency VCO (20 GHz) and eliminating multipliers, sub-harmonics due to dividers are typically less than -70 dBc and far out spurious signals are also kept below -70 dBc.


The SC5510A has an additional independent RF2 channel whose frequency range covers 100 MHz to 3 GHz with tuning resolution of 25 MHz. This makes the module ideal for both single-stage RF conversion systems, and dual-stage image suppression up/down converter systems. It makes a great general purpose laboratory signal source where demanding low phase noise and signal purity are needed. It is also an ideal choice as an integrated clock source for fast DAC and ADC applications, especially those that require variable sampling rates.

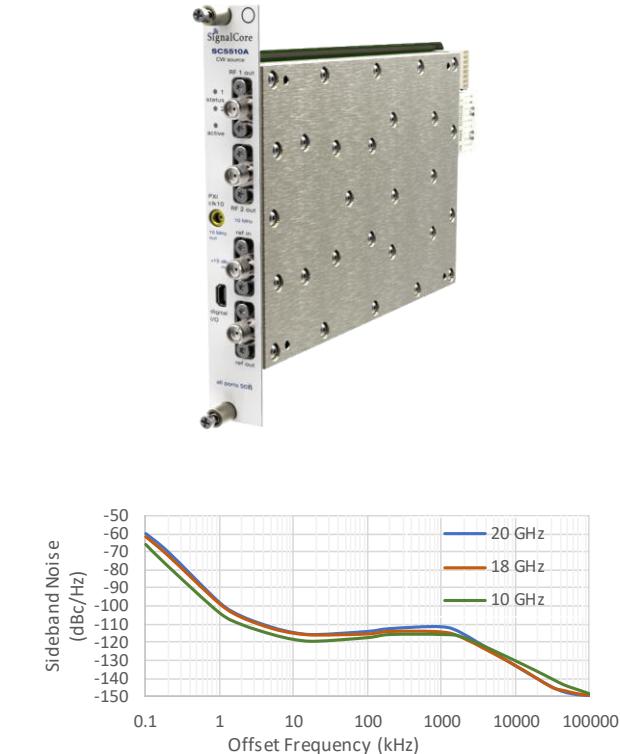

### Product Features

- Low residual phase noise typically -137 dBc/Hz at 10 kHz, 1 GHz
- 100 MHz to 20 GHz output range
- 1 Hz tuning resolution (exact frequency)
- < -25 dBm to +13 dBm leveled output
- Spurious signals <-70 dBc typical
- Dual independent channels

### Simplified Functional Diagram

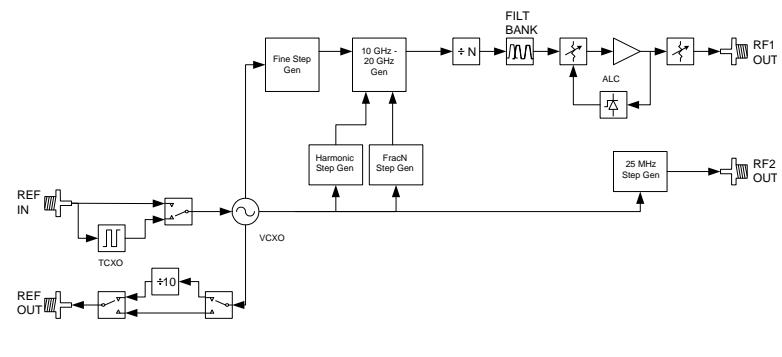

# SC5510A SPECIFICATIONS

## TECHNICAL SPECIFICATIONS (AT 25°C AMBIENT, SINE WAVEFORM)

### RF1 SPECTRAL SPECIFICATIONS

RF output frequency range	100 MHz to 20 GHz
Internal reference	
Stability <sup>1</sup>	±200 ppb
Aging	< 1 ppm after 1 year
Phase locking range	±5 ppm
Tuning	
Resolution	1 Hz
Speed (settled to 1 ppm) <sup>2</sup>	< 500 us
Sideband phase noise <sup>3</sup> (dBc/Hz)	

Offset	RF Frequency							
	1 GHz		5 GHz		10 GHz		20 GHz	
	typ	max	typ	max	typ	max	typ	max
100 Hz	-100	-94	-86	-80	-80	-70	-74	-64
1 kHz	-123	-117	-109	-91	-103	-97	-97	-91
10 kHz	-137	-131	-123	-118	-117	-112	-111	-106
100 kHz	-137	-131	-123	-118	-117	-112	-111	-106
1 MHz	-137	-131	-123	-118	-117	-112	-111	-106
10 MHz	-150	-147	-139	-135	-133	-130	-131	-130
Floor	-153	-149	-150	-147	-147	-145	-145	-145

### Spurious Signals

< 10 MHz offset	
typical	-65 dBc
max	-55 dBc
> 10 MHz offset	
typical	-75 dBc
max	-70 dBc

### RF1 AMPLITUDE SPECIFICATIONS

Output range <sup>4,5</sup>	-25 dBm to +13 dBm
Max output	> +15 dBm typical
Amplitude resolution	0.01 dB
2 <sup>nd</sup> order harmonics (0 dBm)	< -20 dBc
Sub-harmonics	< 70 dBc typical
Output level accuracy <sup>5</sup>	< ±1.0 dB typical

### RF2 SPECIFICATIONS

RF range	100 MHz to 3 GHz
Frequency step resolution	25 MHz
Power output	5 dBm typical
2 <sup>nd</sup> order harmonics (0 dBm)	< -15 dBc
Phase Noise @ 1 GHz	
1 kHz	-110 dBc/Hz
10 kHz	-118 dBc/Hz
100 kHz	-118 dBc/Hz
1 MHz	-142 dBc/Hz
10 MHz	-160 dBc/Hz

### Terminal Specifications

RF output terminals	
Impedance	50 Ω
Connector type	SMA female
Coupling	AC
Reference input terminal	
Impedance	50 Ω
Connector type	SMA female
Coupling	AC
Frequency	10 MHz
Amplitude range	0 dBm to +13 dBm
Lock range	±5 ppm
Reference output terminal	
Impedance	50 Ω
Connector type	SMA female
Coupling	AC
Frequency	10/100 MHz
Amplitude	+3 dBm typ
PXI 10 MHz clock output terminal	
Impedance	50 Ω
Connector type	MCX
Coupling	AC
Frequency	10 MHz
Communication interface	PXI Express

### ENVIRONMENTAL

Operating temperature <sup>6</sup>	-10 °C to +55 °C
Operating relative humidity	10% to 90%, non-condensing
Operating shock	30g, half-sine pulse, 11 ms duration
Operating vibration	5 Hz to 500 Hz, 0.31 g <sub>rms</sub>
Altitude 2000 m max (maintaining 25 °C ambient temperature)	

### GENERAL SPECIFICATIONS

Power consumption	+12 V @ 1.6 A
	+3.3 V @ 0.2 A
Weight	1 lb
Dimensions (W x H x D, max envelope)	0.8" x 5.1" x 7.2"
Warranty	3 years parts and labor on defects in materials or workmanship

### ORDER INFORMATION

7100044-01	SC5510A, 20 GHz Signal Source
	PXI Express Interface

Specifications are subject to change without notice. For the most recent product specifications, please visit [www.signalcore.com](http://www.signalcore.com).

- (1) Internal reference is a TCXO. For better accuracies and stability SignalCore recommends phase-locking to a precision external source.
- (2) For step change of less than 100 MHz and only when automatic amplitude adjustment is turned off.
- (3) Specified for channel RF 1 at power levels of greater than 0 dBm.
- (4) Output leveled range is typically -30 dBm to +13 dBm for frequencies <18 GHz. The leveled range is typically -30 dBm to + 10 dBm for frequencies >18 GHz. ALC closed.
- (5) Output levels < -25 dBm, may degrade to ±3.0 dB typical at some frequencies and not guaranteed.
- (6) The PXIe chassis must be capable of cooling 30W per module slot under these temperatures.